

Indoor PM from residential coal combustion: levels and chemical composition

Estela D. Vicente^{1,2}, A. I. Calvo¹, A. Sánchez de la Campa³, J. de la Rosa³, F. Oduber¹, R. Fraile¹ and C. A. Alves²

¹Department of Physics, University of León, León, 24071, Spain

²Department of Environment and Planning, CESAM, University of Aveiro, Aveiro, 3810-193, Portugal

³Associate Unit CSIC-University of Huelva "Atmospheric Pollution", CIQSO, University of Huelva, Huelva, E21071, Spain

Keywords: coal combustion, indoor air quality, PM₁₀, PM-bound constituents.

Presenting author email: rfral@unileon.es

Introduction

Coal is still the dominant fuel contributing to the PM_{2.5} disease burden in several countries (McDuffie et al., 2021). Even though the greatest health losses caused by solid fuels combustion were recorded in Eastern and South-eastern Asia and Sub-Saharan Africa (IEA, IRENA, UNSD, World Bank 2022), coal combustion is still used as a source of heating in several European countries (Kerimray et al., 2017). Thus, considering that quantitative estimates of residential coal combustion for indoor air pollution levels in European countries are limited so far, this study intends to assess household PM levels in a household that relies on coal for wintertime heating. Additionally, the chemical characteristics of PM samples will be evaluated.

Methods

• Sampling



• PM₁, PM_{2.5}, PM₄ and PM₁₀ (laser photometric instrument)

• Temperature, RH, CO₂, CO

• PM₁₀ (gravimetric quantification)

• Chemical characterisation PM₁₀



ICP-AES and ICP-MS
Major and trace elements

Thermal-optical method
Organic and elemental carbon

Ion Chromatography
Water soluble ions



Results

PM Measurements

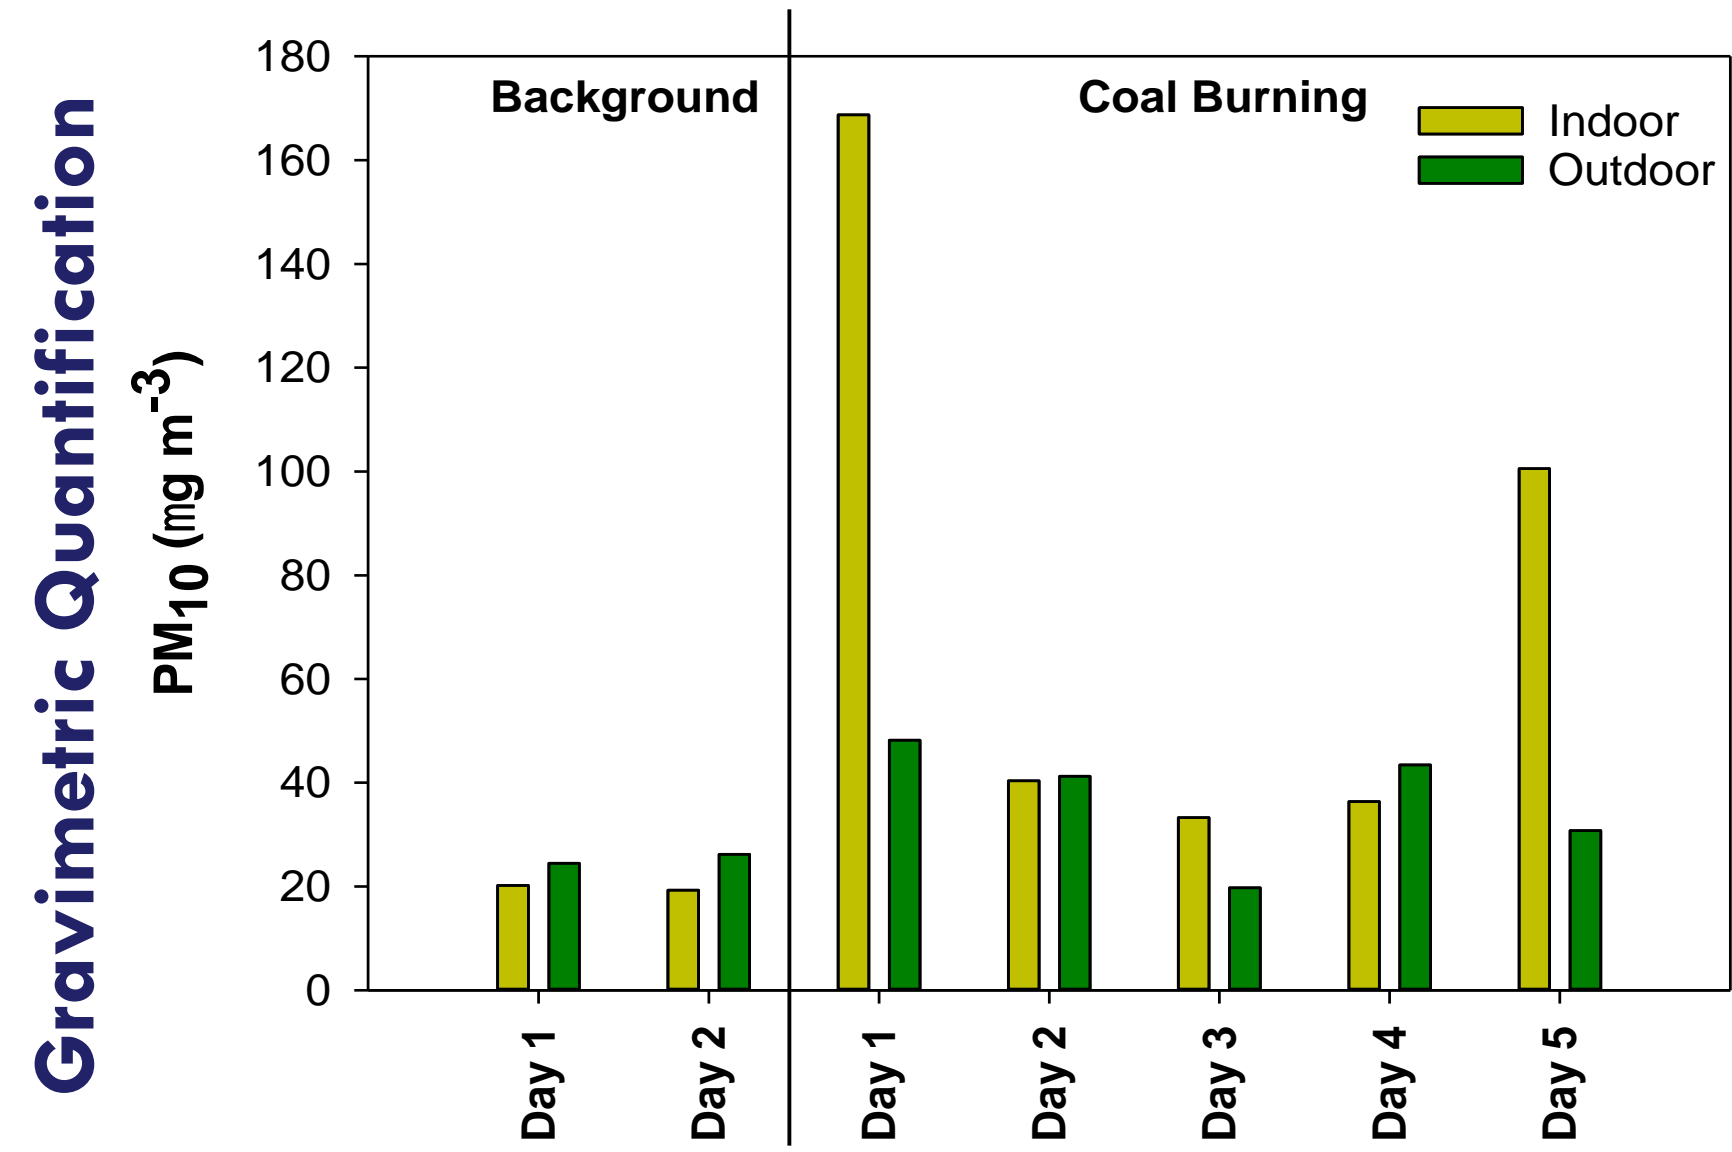


Figure 1. Average PM₁₀ concentrations during coal combustion and without indoor activities (background).

Temperature, RH, CO₂, CO

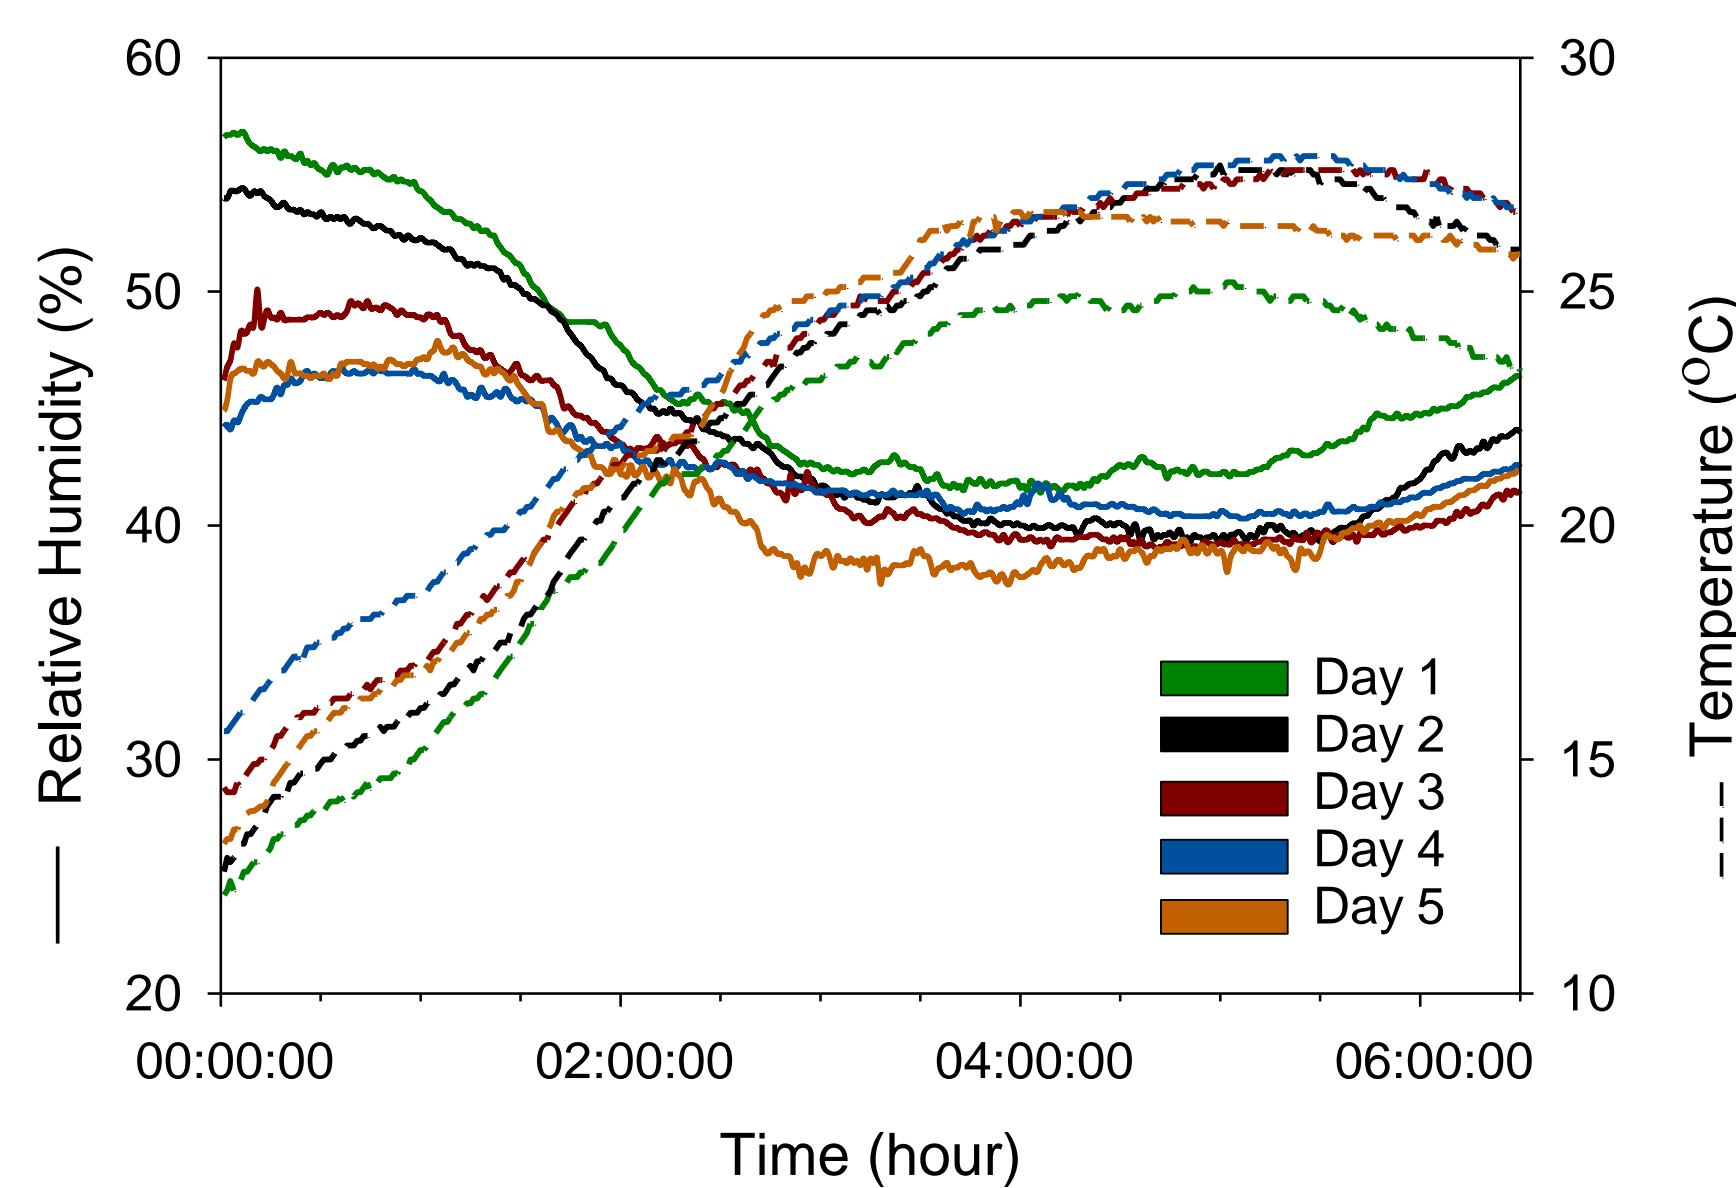


Figure 3. Indoor daily profiles of temperature and relative humidity during coal combustion.

PM Chemical Characterisation

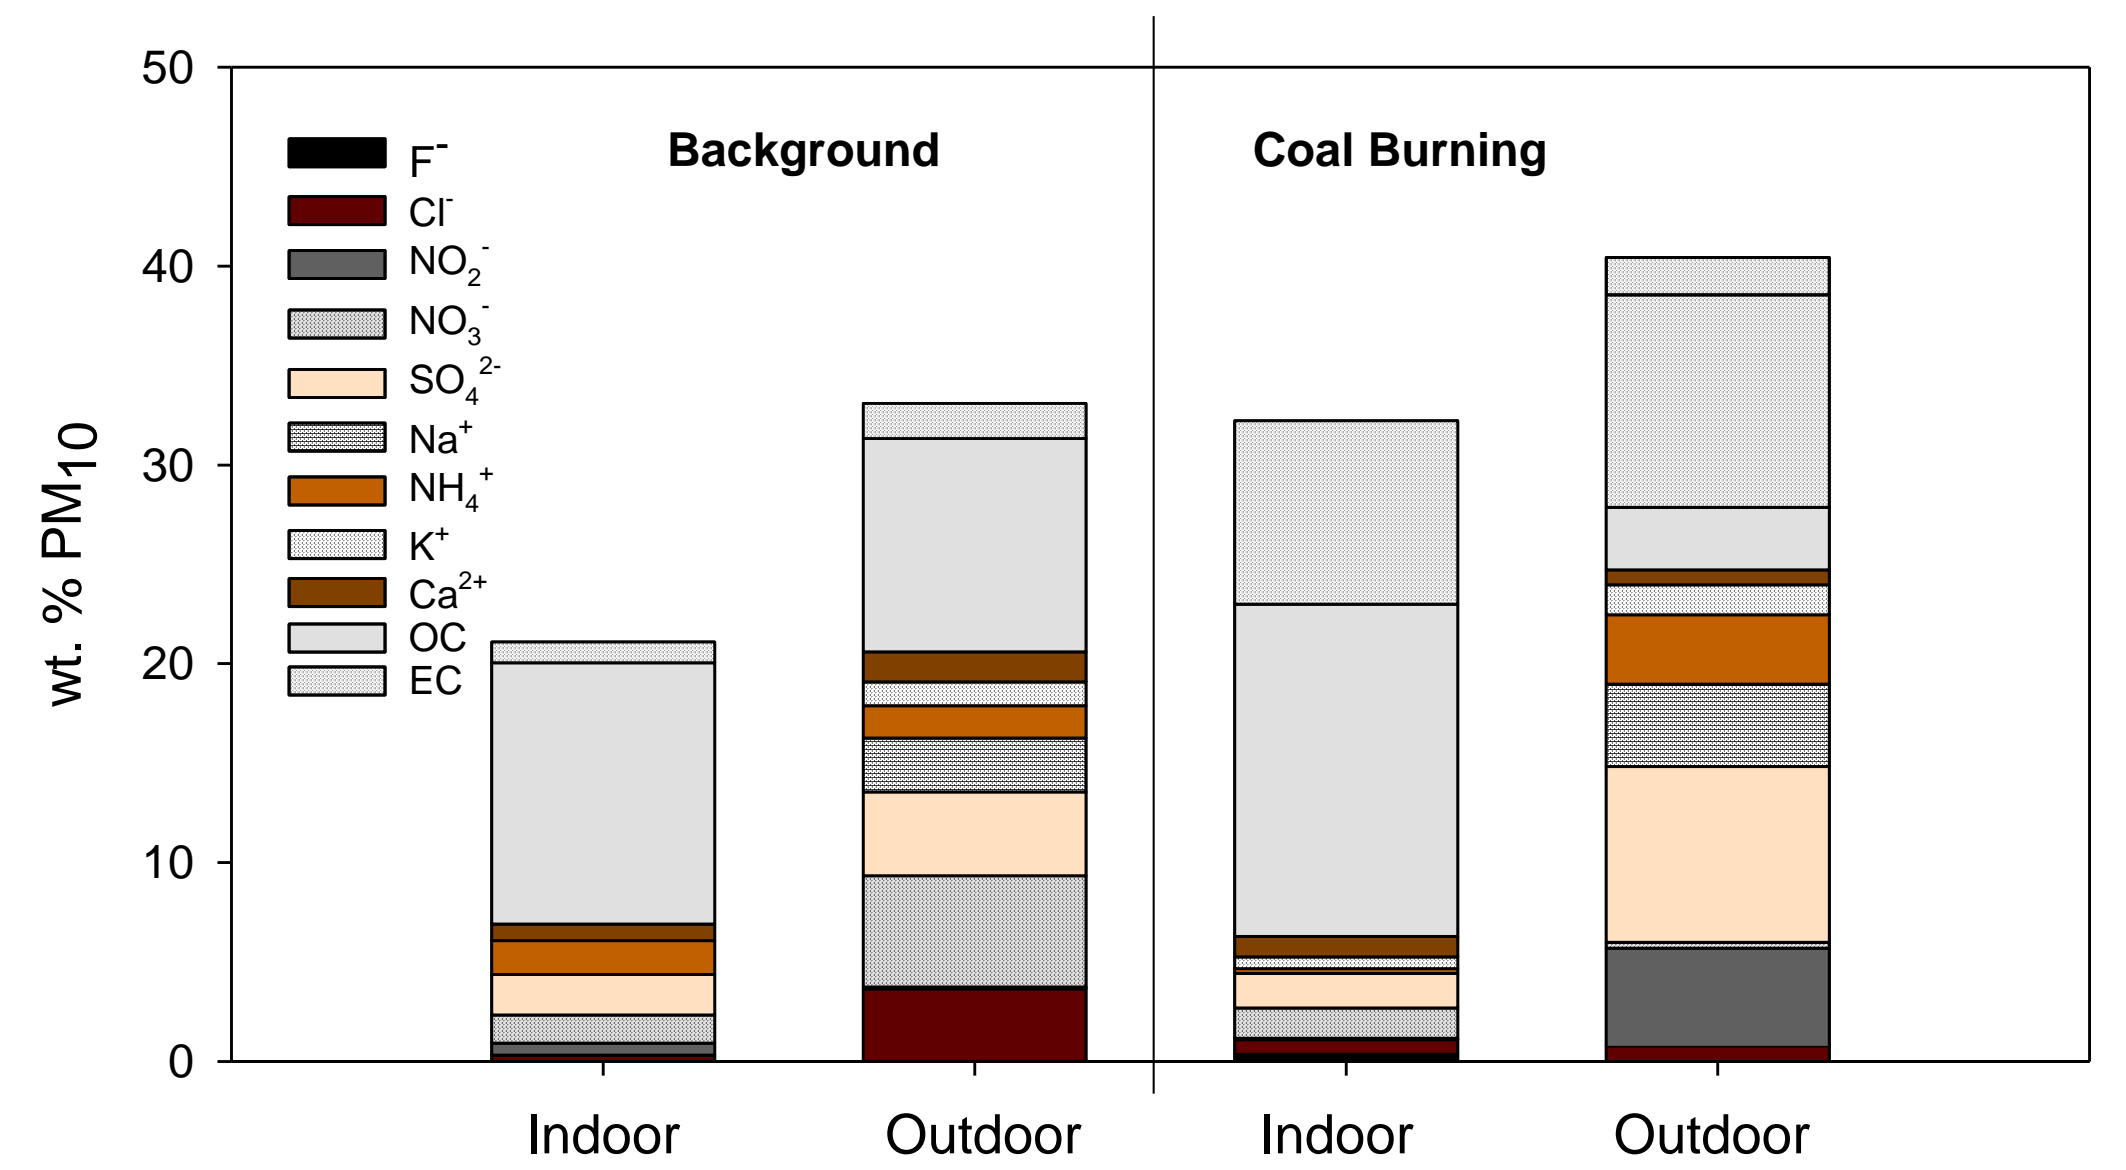


Figure 5. Average PM₁₀ chemical composition during coal combustion and without indoor activities (background).

Real Time Monitoring

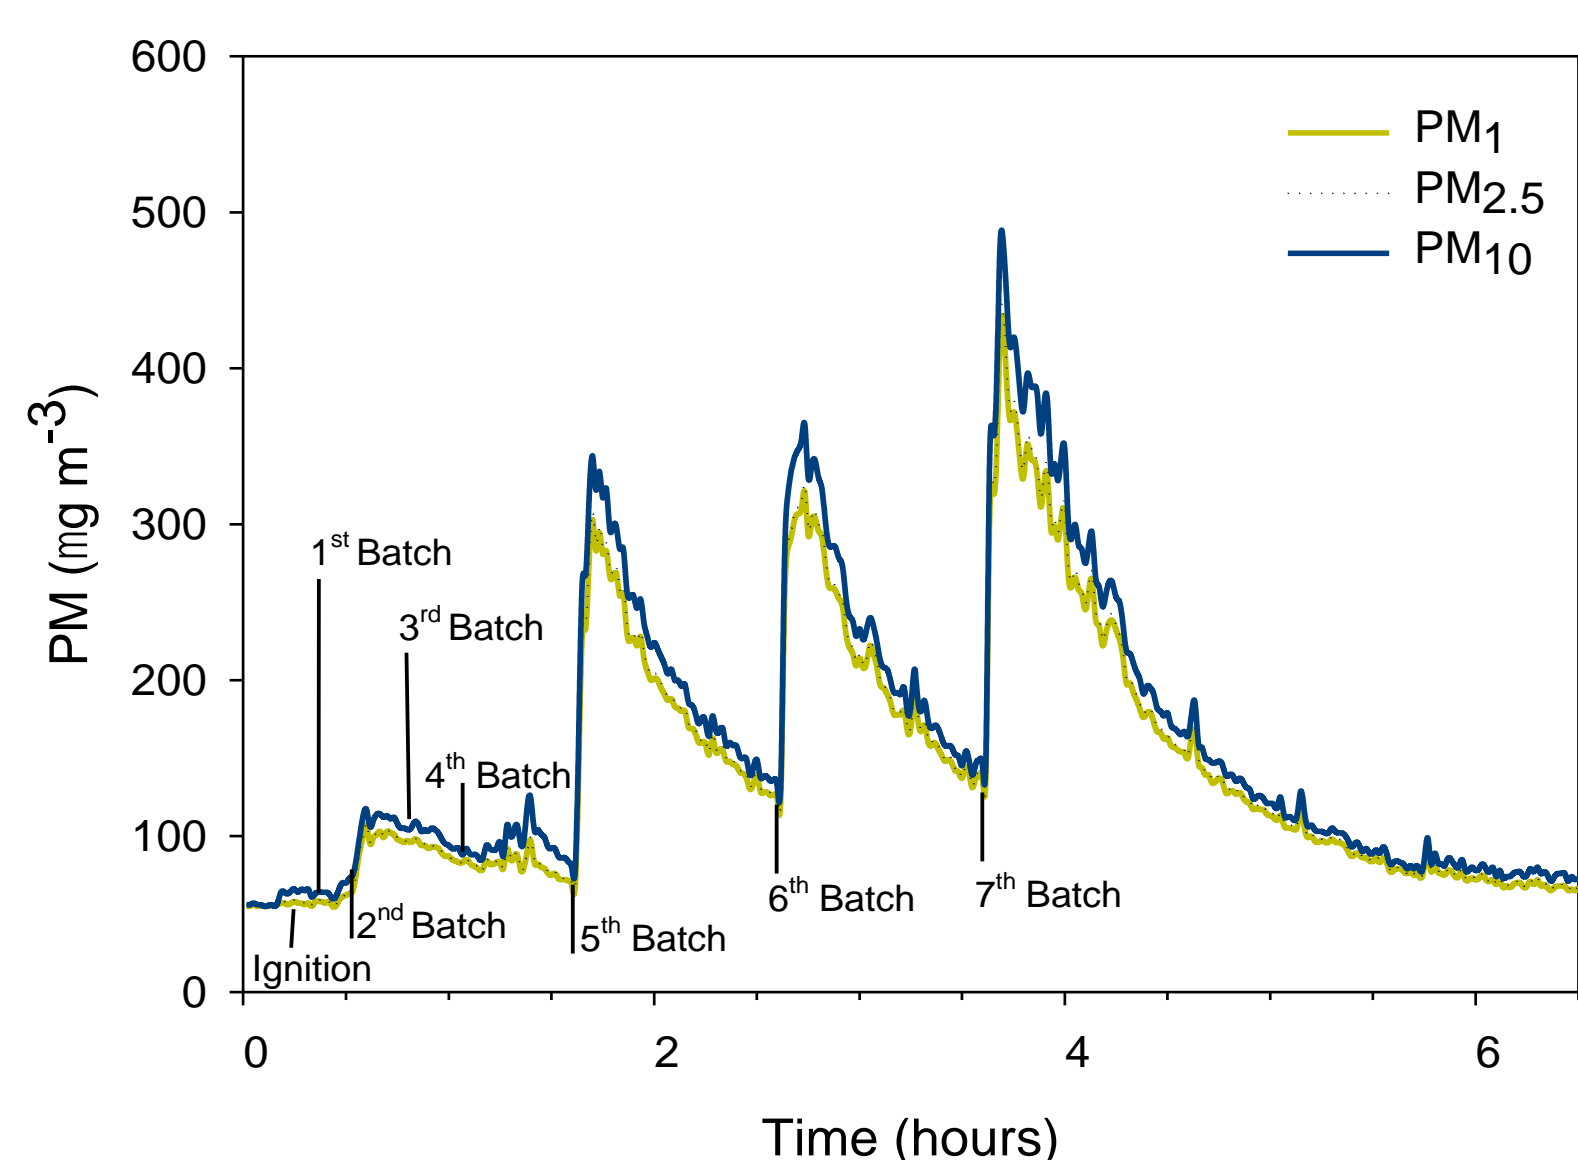


Figure 2. Indoor daily profiles of PM₁, PM_{2.5} and PM₁₀ measured indoors during coal combustion (Day 5).

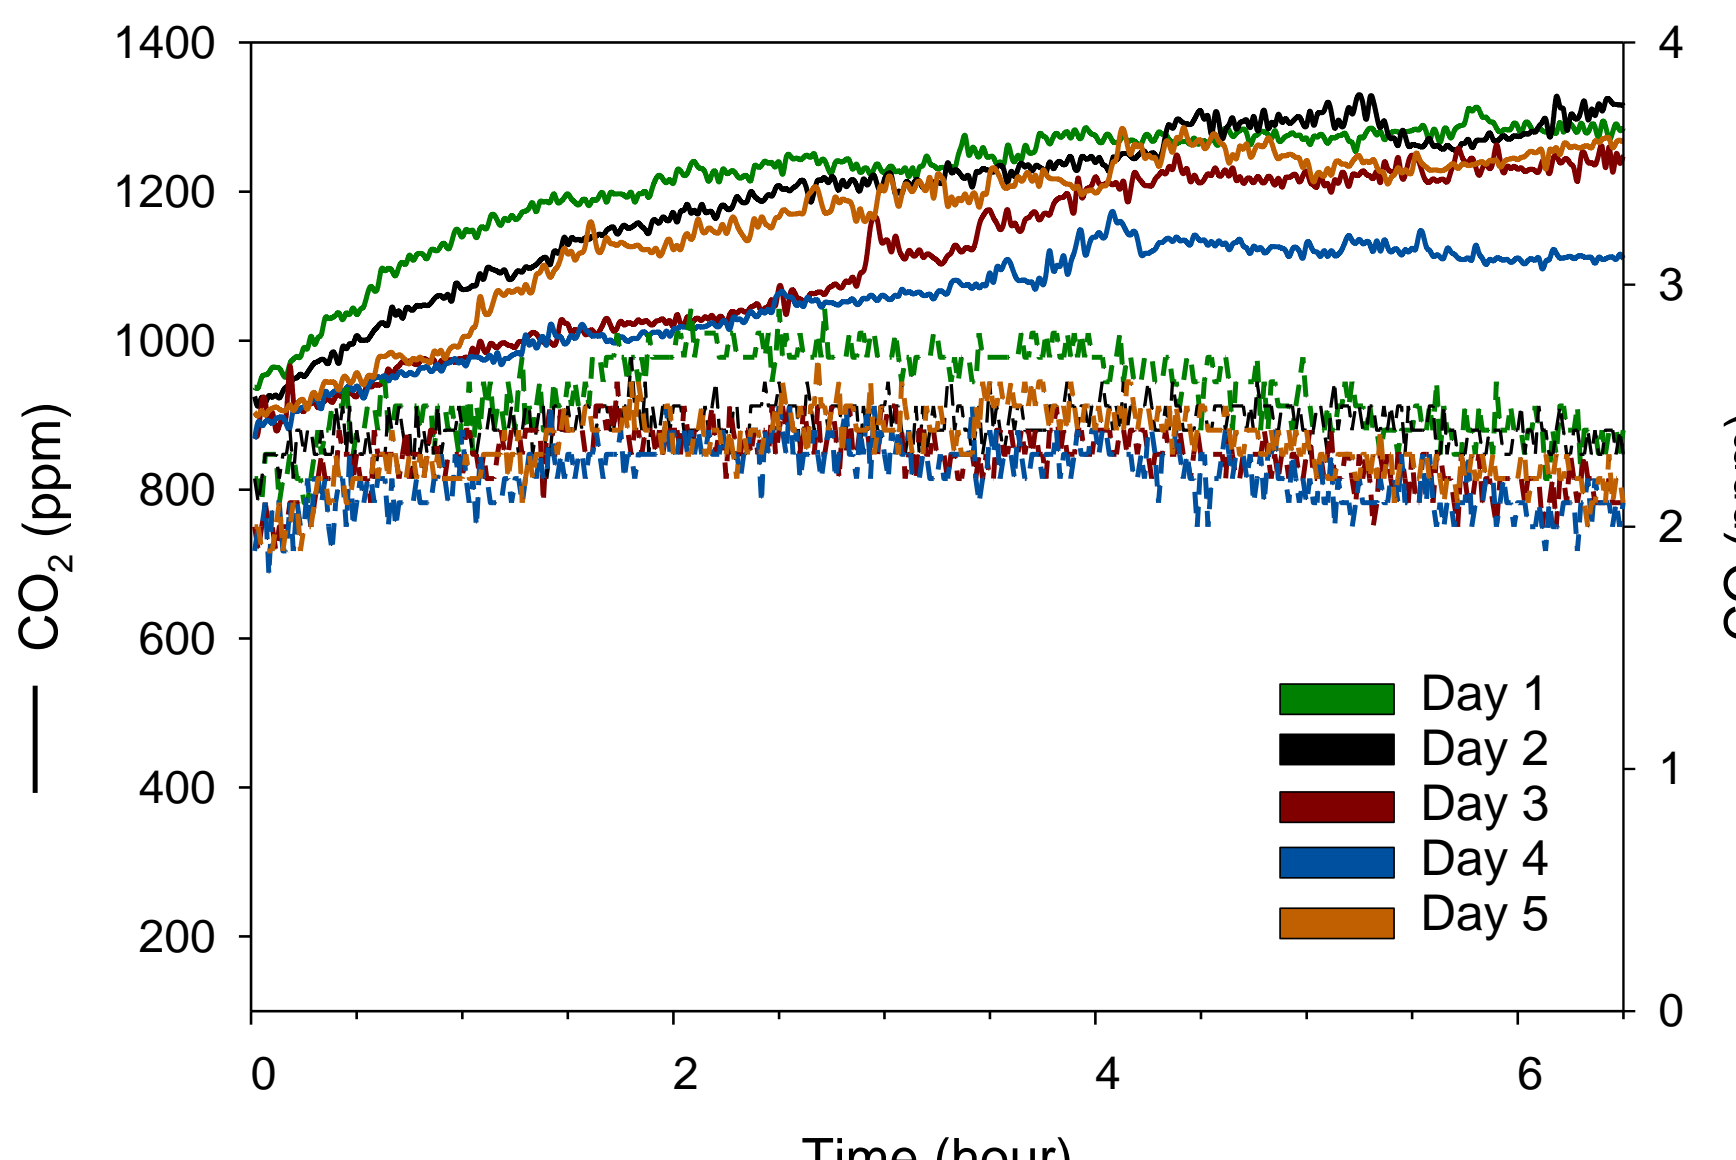


Figure 4. Indoor daily profiles of carbon dioxide and carbon monoxide during coal combustion.

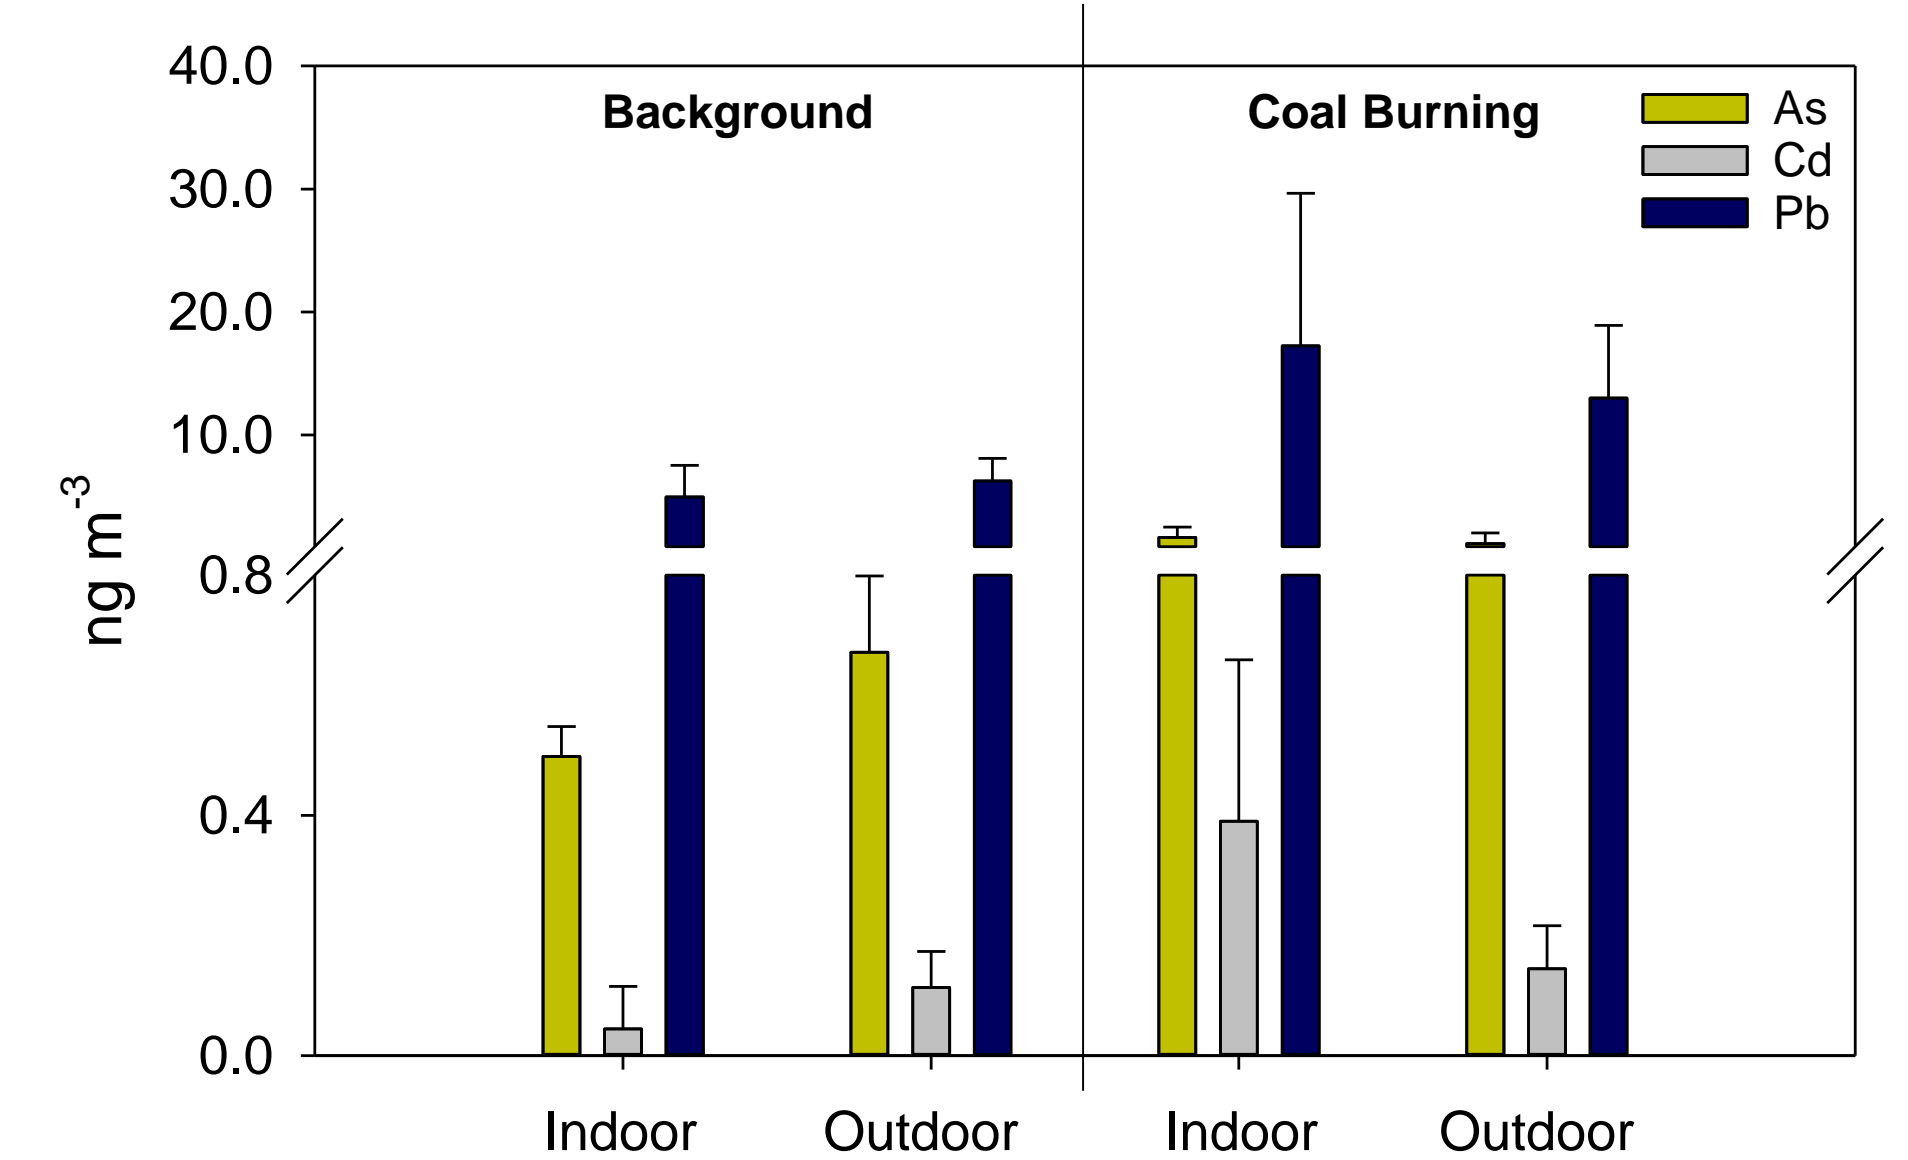


Figure 6. Average concentration of toxic metals during coal combustion and without indoor activities (background).

REFERENCES

IEA, IRENA, UNSD, World Bank W (2022) Tracking SDG 7: The Energy Progress Report. Washington DC
Kerimray A, Rojas-solórzano L, Amouei M, et al. (2017) Energy Sustain. Dev. 40, 19–30.
McDuffie EE, Martin R V., Spadaro J V., et al. (2021) Nat. Commun. 12, 1–12.

ACKNOWLEDGMENTS

This work was partially supported by the Junta de Castilla y León co-financed with European FEDER funds (Grant LE025P20) and by the AEROHEALTH project (Ministry of Science and Innovation, co-financed with European FEDER funds, grant PID2019-106164RB-I00). This research has also been supported by the RADIATE project under the Grant Agreement 824096 from the EU Research and Innovation programme HORIZON 2020. Furthermore, it is part of the project TED2021-132292B-I00, funded by MCIN/AEI/10.13039/501100011033 and by the European Union "NextGenerationEU"/PRTR.

CONCLUSIONS:

- The study included simultaneous measurements inside and outside, covering several days in which the combustion conditions were tried to be replicated, and also measurements of the background air in the absence of the source.
- Indoor PM₁₀ concentrations increased 1.6 to 8.8 times compared to background air. Daily variability in indoor PM₁₀ levels was associated not only with chimney draught, but also with coal burnt.
- The mean PM₁₀ I/O ratio was 2.1 ± 1.3 and 0.78 ± 0.06 , during coal combustion experiments and background measurements, respectively, confirming the relevance of coal emissions to levels measured indoors.
- The ignition and initial preheating of the stove, as well as fuel refills, generated high PM peaks indoors.
- Indoors, during coal combustion, PM₁₀ mass was mainly composed of carbonaceous particles, accounting for 20.7 – 29.8 wt. %. Water-soluble ions represented a small fraction of the PM₁₀ mass (5.90 ± 3.70 wt. %) and were dominated by sulphate and nitrate. The indoor concentrations of arsenic, was more than three times higher than those of the background air. Additionally, the indoor concentrations of other toxic and carcinogenic species (such as Pb and Cd) also showed an increase during coal combustion.